




TECHNICAL SPECIFICATION FOR ACCELEROMETER DRIVE UNIT MTN/APSU01

This Unit has been designed to provide a battery powered or optional DC input constant current source for use with constant current accelerometers, various number of ways and connection options available.

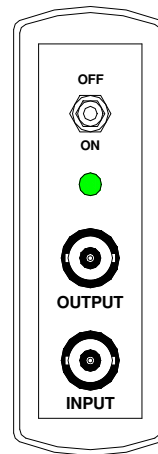

Technical Specification

Input	Constant current accelerometer
Output	Acceleration (mV/g)
Connections	Glanded or BNC (to be specified at point of order)
Battery Powered	Battery life 10 hrs, low battery LED indicator, 2 x PP3
Housing	Portable case, 140mm x 90mm wide x 45mm deep
Channels	1,2,3 or 4 (to be specified at point of order)